



Sensecube

Optimized Solutions for **Sensing** and **Measurement**

CO₂ Sensor / O₂ Sensor / Agriculture Sensors / Data Logger



SENSECUBE
Sensing And Measurement Solutions


Optimized Solutions for Sensing and Measurement

SENSECUBE is a registered trademark of Industrial Sensor business of Korea Digital which established in 1997. Based on 30 years of sensor expertise and manufacturing experience, SENSECUBE provides solutions for sensing and measurement which optimized for customer's needs.



SENSECUBE CO₂ SENSOR

NDIR CO₂ Sensor Principle

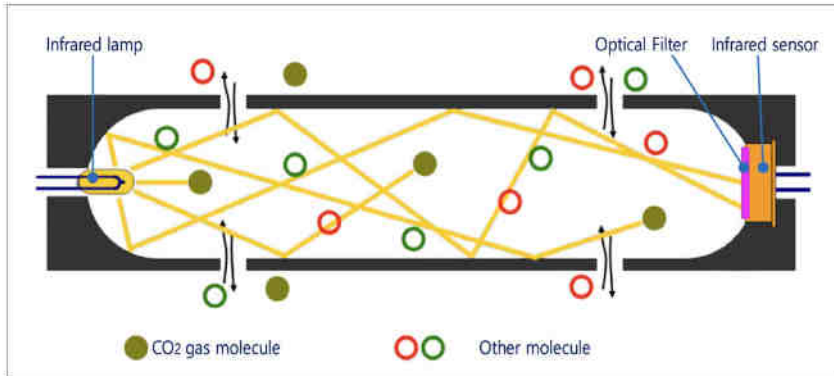


The NDIR method utilizes the phenomenon that asymmetric or multiatomic gas molecules selectively absorb the wavelength of light corresponding to their natural vibration energy.

For example, H₂O shows maximum absorption rate at 1.4 μ m and 1.9 μ m while SO₂ at 4.0 μ m, CO₂ at 4.3 μ m and NO at 5.3 μ m.

CO₂ gas concentration can be detected by converting the absorbed amount of 4.3 μ m wavelength light emitted from the infrared lamp in different gas concentration into electrical signal while it reaches the sensor.

Difference between Dual Wavelength Type and Single Wavelength Type

Single Wavelength Type

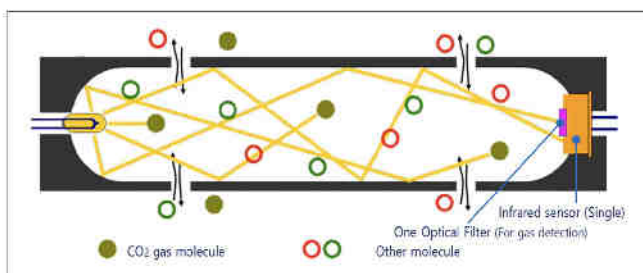


In general, it is called 'single type' in the market and most of low-price NDIR sensors on the market are single type.

However, single type needs frequent calibration due to the errors caused by deterioration with age or influence of external temperature which caused by long-term use of lamp, power supply, amplifier and etc.

It may not be suitable for indoor air control system depending on the installation environment if it is not used for calibratable instruments which use standard gas for measurement.

In most cases, those NDIR sensors which are not specified as dual type are single type.

Dual Type

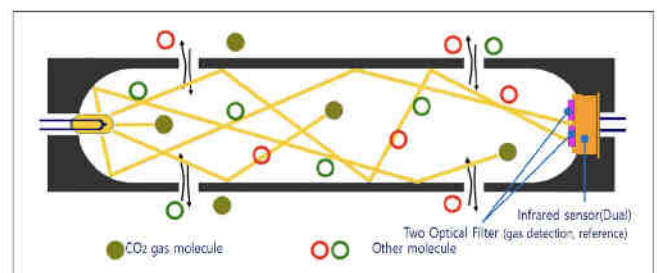

It is a type that compensates for the disadvantages of single type and is generally called 'dual type' in the market.

Dual type contains two sensors in a package. One of them detects the amount of infrared light which is influenced by carbon dioxide (CO₂) level while the other detects the "reference data"

"Reference data" is detected data of infrared light in the wavelength band which is not affected by CO₂ or other gases, and it acts as a self-calibration according to external influences.

It is the most stable type and can maintain longterm precision without any calibration and is also most commonly used for IAQ.

Types and Characteristics of CO₂ Gas Sensors

This is a relative comparison of the CO₂ gas detection method currently in use.

Type	Principal	Sensitivity	Accuracy	Selectivity	Response	Life Time	Economic
 Semiconductor type	It is a method using the change of electrical conductivity according to the gas concentration. When the boundary of semiconductor constituent particles is exposed to clean air, the electrical conductivity becomes lower due to the formation of potential barrier by oxygen adsorption, but when contacted with reducing gas, the adsorbed oxygen combines with this gas, which lowers the potential barrier and increases the electrical conductivity.	◎	○	×	◎	○	○
 Solid electrolyte type	Solid is generally classified into conductors, semiconductors, and insulators according to the magnitude of electrical conductivity, but those that exhibit conductivity as the ions move at high temperatures in the insulator are called ion conductors or solid electrolytes. This detection method measures the change of electromotive force detected in the electrolyte according to the gas concentration.	○	×	×	◎	△	◎
 Thermal conductivity type	Depending on the material, the intrinsic constant that indicates the degree of heat transfer is called thermal conductivity. This detection method uses a characteristic in which the intrinsic thermal conductivity differs depending on the gas.	×	○	×	○	○	○
 Nondispersive Infrared absorption type (NDIR)	This method uses the phenomenon that the gas molecules having an asymmetric structure or more than 3 atoms selectively absorb the energy corresponding to its own vibration energy have excellent selectivity, high precision, high reliability and long-term stability. NDIR CO₂ gas sensor module has been difficult to apply at reasonable price depending on imports, but the price has dropped to low level as our "Korea Digital Co., Ltd" is the first localization in Korea.	◎	◎	◎	○	◎	△

※ There are various gas detection methods such as catalytic combustion, pyrolysis, and ion, but they are not suitable for measuring non-inert gas (CO₂ gas). So, It is excluded from the comparison.

※ The table above is a relative comparison of common characteristics

CO₂ Sensor Module

CO₂ Sensor module specification

Applicable model		KCD-AN300	KCD-HP100	KCD-HP200	KCD-HP300	KCD-HS100	KCD-HS300	KCD-HC	KCD-HF	Remark
Measurement range	0 ~ 2,000 ppm	○	○			○				
	0 ~ 3,000 ppm	○	○			○				
	0 ~ 5,000 ppm	○	○			○				
	0 ~ 8,000 ppm	○	○			○				
	0 ~ 10,000 ppm	○	○			○				
	0 ~ 2%		○	○		○		○	○	
	0 ~ 5%			○			○	○	○	
	0 ~ 10%			○			○	○	○	
	0 ~ 20%				○		○	○	○	
Analog output	0 ~ 4VDC	○	○	○	○	○	○	○	○	
	0 ~ 5VDC	○	○	○	○	○				
	0 ~ 10VDC	○	○	○	○	○				
	4 ~ 20mA	○	○	○	○	○				
Digital output	UART	○								
	PWM									
	RS-485		○	○	○	○	○	○	○	
Power supply	8 ~ 12VDC							○	○	
	14 ~ 24VDC	○	○	○	○	○	○			
	24VAC/DC									
Others	Circuit enclosure	○	○	○	○	○	○	○	○	
	Gas filter enclosure	○	○	○	○	○	○	○		
	Diffusion Type	○	○	○	○	○	○	○		
	Flow-through Type		○	○	○	○	○		○	

- 1) The output signal and the measurement range are optional standards.
- 2) To meet some specifications, accessories sold separately are required.
- 3) Please contact us for unspecified standards.
- 4) Output voltage maybe limited depending on the power used.
- 5) Power specification : It may vary depending on environment.

KCD-AN300	KCD-HP100	KCD-HP200	KCD-HP300
			
KCD-HS100	KCD-HS300	KCD-HC	KCD-HF
			



KCD-HP100, HP200, HP300

Measurement

Measurement range	0~1%(2000ppm, 3000ppm, 5000ppm) / 0~10%, 0~20%
Accuracy*	±(3%FS+2%Reading)
Response Time	Within 1 minute(τ)
Signal update	every 0.75second

General

Initial start-up time	Storage	Within 1 minute
temperature		-40~70°C

Operating conditions


Operating temperature	5~45°C
Operating humidity	0~95%RH(Non-condensing)

Electrical

Power supply	12~28VDC
Current consumption	average 70mA
Output signal	Choose from 0~5VDC, 0~10VDC, 4~20mA
Communication	RS-485 (Modbus RTU)

Operating conditions

Main Body	Φ43mm x 160mm / Φ43mm x 94mm
Cable	approx 1m Option 3m
Weight	below 350g / below 250g

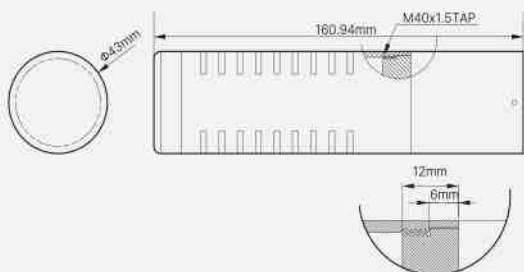

* Medium value of detection range with equipment conditions of the manufacturing plant @25°C

* The measurement range is adjusted in units of 1000 ppm

* When using the output signal 0-10V, the power supply is recommended to be 16VDC or higher.

※ Calibration may be necessary in a one-year period when using the normal environment

※ The above images and specifications are subject to change without notice for performance and quality improvement



KCD-HS 100, 300

Measurement

Measurement range	HS100 : 2000ppm, 3,000ppm, 5,000ppm, 1% HS300 : 2%, 5%, 10%, 20%
Accuracy*	±(3% F.S.+2%Reading)
Response Time	Within 65 seconds
Signal update	every 0.75second


Operating conditions

Operating temperature	5~45°C
Operating humidity	0~95%RH(Non-condensing)
Storage temperature	-40 ~ 70°C

Electrical

Power supply	12~24VDC
Poewer consumption	average 70mA
Analog Output	4~20mA
Communication	RS-485(Modbus RTU)

Outside view

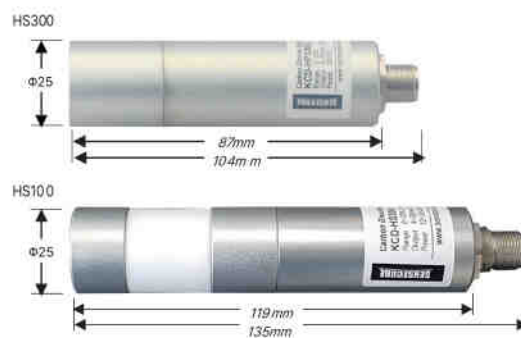

Connector

Sensor side



Cable side



CO₂ Sensor Module



KCD-HC (Diffusion aspirated type)

KCD-HF (Flow through type)

Measurement

Measurement range	5%, 10%, 20%
Accuracy*	$\pm(3\%FS+2\%Reading)$
Response Time	within 1 minute(± 63)
Signal update	every 0.75 second

General

Initial start-up time	within 1 minute
Storage temperature	-40~70°C

Operating conditions


Operating temperature	5~45°C
Operating humidity	0~95%RH(Non-condensing)

Electrical

Power supply	8~15VDC
Output signal	0~4VDC
Communication	RS-485 (Modbus RTU)
Current consumption	average 70mA

Dimensions

Weight	below 70g
--------	-----------

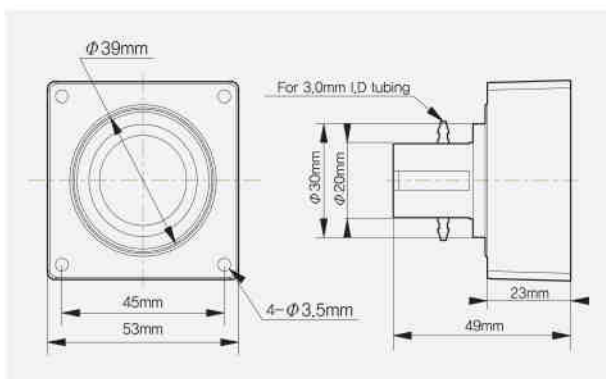

* Medium value of detection range with equipment conditions of the manufacturing plant @25°C

※ Calibration may be necessary in a one-year period when using the normal environment.

※ The above images and specifications are subject to change without notice for performance and quality improvement.



KCD-HS800

Measurement

Measurement range	0.1~20 Vol.%
Accuracy*	$\pm(3\% F.S.+2\%Reading)$
Response Time	Within 65 seconds
Signal update	every 0.75second


Operating conditions

Operating temperature	5~45°C
Operating humidity	0~95%RH(Non-condensing)
Storage temperature	-20 ~ 70°C
Sensor high temperature limits	150°C (only sensor, No CO ₂ Measurement)

Electrical

Power supply	12~24VDC
Poewer consumption	average 70mA
Analog Output	4~20mA
Communication	RS-485(Modbus RTU)

Outside view

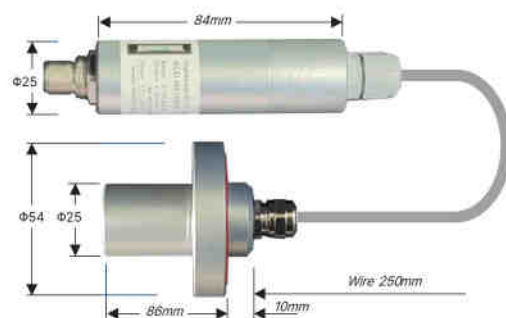


Connector

Sensor side



Dimensions



Cable side



※ The above images and specifications have possibility to be changed without notice for performance and quality improvement.



KCD-DA100

Measurement

Measurement range	CO ₂	0~2,000/5000/10,000ppm
	Temperature	0~60℃
	Humidity	0~99% RH (option)
Accuracy*	CO ₂	±(4%FS+3%Reading)
	Temperature	±2℃
	Humidity	±3 % (option)
Response Time (t63)	CO ₂	within 30 seconds
	Temperature	within 10 seconds (option)
	Humidity	
Signal update		every 0.75second
Interface		LCD, 3 button switch

General


Initial start-up time	CO ₂	within 3 minutes
	Temperature,	within 30 seconds
	Humidity	(option)
Storage temperature		-20 ~ 80℃
Operating environment		5 ~45℃ (CO ₂)

Electrical

Power supply		24 V AC/DC ±10%
Current consumption		average 70mA
Output signal	CO ₂	0~10VDC or 4~20mA, RS-485
	Temperature	Relay SPST
	Humidity	0~10VDC or 4~20mA

Dimensions

82mm × 124 mm × 29 mm
below 150g

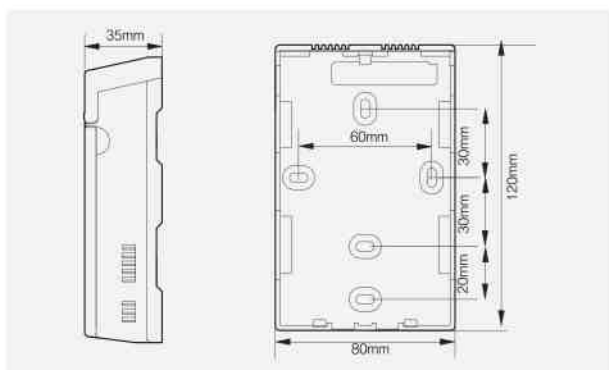

※ The temperature and humidity functions of KCD-DA model are optional.



KCD-AN300

Measurement

Measurement range	0~2000ppm, 0~3000ppm, ~5000ppm, ~10000ppm
Accuracy*	±(4%FS+3%Reading)
Response Time	Within 40 seconds(τ)
Signal update	1.5 seconds

General

Initial start-up time	within 1 minute
Storage temperature	-40~70℃

Operating conditions


Operating temperature	0~50℃
Operating humidity	0~95%RH(Non-condensing)

Electrical

Power supply	12~24VDC
Current consumption	average 70mA
Output signal	choose form 4~20mA, 0~10VDC, 0~5VDC
Communication	UART(38,400bps)

Operating conditions

L x W x H	93mm × 53mm × 28mm (w/CASE)
Screw interval	84mm±0.2mm(Φ3.5mm)
Weight	below 30g

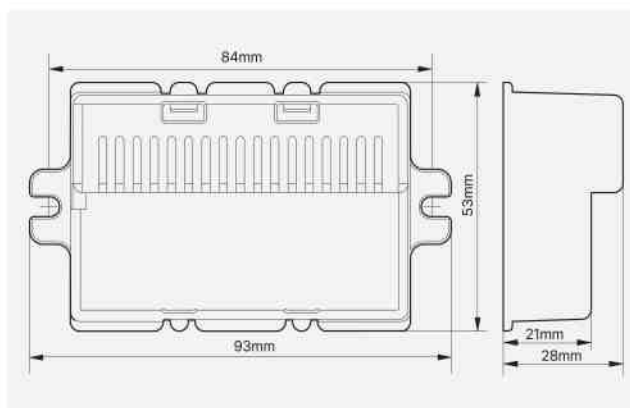

* Medium value of detection range with equipment conditions of the manufacturing plant @25℃

* The measurement range is adjusted in units of 1000 ppm

※ The above images and specifications are subject to change without notice for performance and quality improvement.



O₂ Sensor Module

Comparing detection method of O₂ gas sensor

Type	Principal	feature
Titanium type (Semiconductor type)	This sensor uses the change in resistance of an electron donor of a gas to be detected adsorbed on the surface of an oxide semiconductor or a resistance of a semiconductor element depending on electron acceptability and the element material is titania (TiO₂ titanium dioxide). Titania is an n-type semiconductor device. When a constant voltage is applied to a titania element using a characteristic that the resistance becomes small when the amount of oxygen around the titania is high and the resistance becomes large when the amount of oxygen is small, the resistance value and the voltage changes while changing.	Small and lightweight. The sensitivity is relatively high. The life span of the sensor is long. (5 to 6 years) Selectivity to gas is poor. Temperature dependency is high, requiring temperature compensation It operates at high temperatures above 300°C.
Galvanic type (Electrochemical)	It is made by noble metal (silver or gold) as the anode and a non-metal (lead) as the cathode and precipitating it in the electrolytic solution (caustic soda water). The gas concentration is detected by the reduction current generated in proportion to the oxygen dissolved in the electrolyte solution by the oxygen in the gas	Can be measured at room temperature. The linearity of the output signal is good. Temperature and humidity are critical. Life is short. (1 year)
Zirconia type (Solid Electrolyte Gas Sensor)	The solid electrolyte that reacts using a solid electrolyte can be used to detect the electromotive force of the cell or the concentration of the current gas. [Concentration cell type] A method of forming a platinum electrode on both sides of zirconium oxide and detecting the electromotive force (voltage) caused by the difference in concentration on both sides. [Limit Current Type oxygen sensor] Oxygen ion conductivity of zirconium oxide is used, and there is no need for troubles such as standard gas and frequent calibration.	Small and lightweight. The life span of the sensor is long. (5 to 6 years) There is no need for separate calibration procedures during use. It operates at high temperatures above 300°C. The price is higher than the electrical formula.
Optical system	In the case of the optical system, a specially designed optical layer is used instead of an oxygen permeable diaphragm, and the reaction characteristic of the light irradiated on the optical layer is used. In the optical layer, when the light of a specific wavelength is irradiated, (Fluorescence quenching time) is inversely proportional to the amount of oxygen in the medium.	Maintenance is convenient. Can be used at room temperature. The life span is longer than the electrolytic type. (2 to 3 years) Initial stabilization time is short. (Within 1 minute) It is expensive compared to chemical formula or electrolytic type.

※ There are various other methods of gas detection, but this comparison is briefly compared with a relatively well known method of detecting oxygen gas.

※ Among SENSECUBE's O₂ gas sensors, the ON-200, ON-200, and ON-400 series use the "zirconia limiting current method," while only the ON-100 series uses the "galvanic method."



KCD-ON420 (Zirconia)

Measurement

Sensor Type	Solid electrolytes (Zirconia)
Measurement Range	0.1 ~25.0 Vol.%,
Accuracy	below ± 1 % FS
Repeatability	± 1 % of measured value

General


Measurement Environment	-10~50°C, 95%RH (non condensing)
Permissible gas temperature	-10 °C to +50°C
Heater Warm up time	About 3 minute

Electrical

Power supply	12~ 24 VDC
Current consumption	below 200mA
Output	4~20mA, 0~10Vdc (or 0~5VDC)
Communication	RS-485 (Modbus RTU)

Dimensions

Body	$\phi 25$ mm x 115mm
Cable	5C (22AWG) x 1.5m

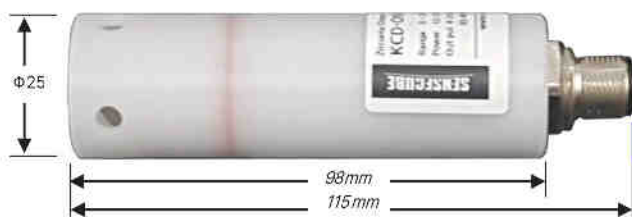

KCD-ON310 (Zirconia)

Measurement

Sensor Type	Solid electrolytes (Zirconia)
Measurement Range	0.1 ⁽¹⁾ ~ 25.0 Vol.%O ₂ , (Option 0.1~95Vol.%)
Accuracy	< ± 1 % F.S.
Repeatability	± 1 % of measured value

General

Measurement Environment	-20~70°C, 95%RH (non condensing)
Permissible gas temperature	-10 °C to +50°C
Heater Warm up time	About 3 minute
Calibration Button	Default (Factory calibration), Span (20.7%)


Electrical

Power supply	12~ 24 VDC
Current consumption	below 200mA
Output	4~20mA, 0~5Vdc (or 0~10VDC)
Communication	RS-485 (Modbus RTU)

Dimensions

Body	53mm x 53mm
Weight	60g

(1) Prolonged operation below 0.1% O₂ can damage the sensing element.

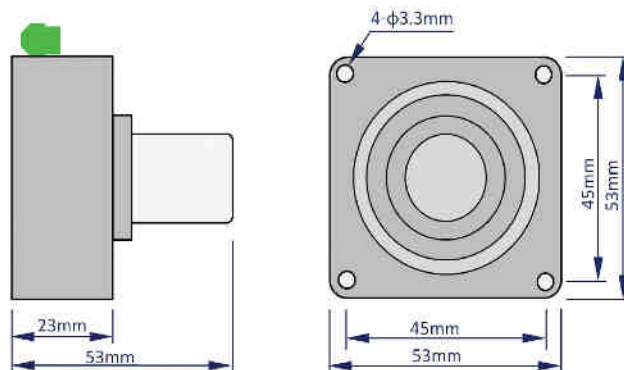

O₂ Sensor Module



KCD-ON320 (Zirconia)

Measurement

Sensor Type	Solid electrolytes (Zirconia)
Measurement Range	0.1 ~ 25.0 Vol.%, (Option 0.1~95 Vol.%)
Accuracy	below ± 1 % FS
Repeatability	± 1 % of measured value

General


Measurement Environment	-20~70°C, 95%RH (non condensing)
Permissible gas temperature	-10 °C to +50°C
Heater Warm up time	About 3 minute
Calibration Button	Default (Factory calibration), Span (20.7%)

Electrical

Power supply	12~ 24 VDC
Current consumption	below 200mA
Output	4~20mA, 0~10Vdc (or 0~5VDC)
Communication	RS-485 (Modbus RTU)

Dimensions

Board	90mm x 70mm (Only Board)
-------	--------------------------

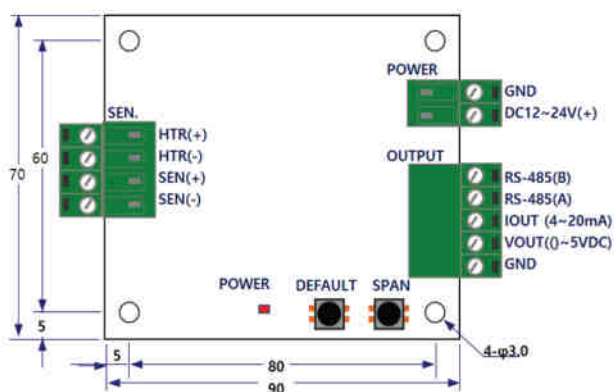

KCD-ON100 (Galvanic Oxygen Sensor)

Measurement

Sensor Type	Electrochemical (Galvanic type)
Measurement Range	0.1 ~ 99.9 Vol.%O ₂
Accuracy	$\pm(0.5\text{vol.}\% + 2\% \text{ Reading})$

General

Preheating time	1 minute
Gas flow	0 ~ 10m/s
Operating Environment	0°C ~ 45°C, 0~95%RH (Non-condensing)
Storage temperature	-20~60°C


Electrical

Power supply	24V AC/DC (Option: 12VDC)
Power consumption	approx 25mA
Analog Output	0~10 VDC, 4~20mA

Dimensions

Board	90mm x 70mm (Only Board)
-------	--------------------------

* Cell (M-04) is a consumable item and sold separately.

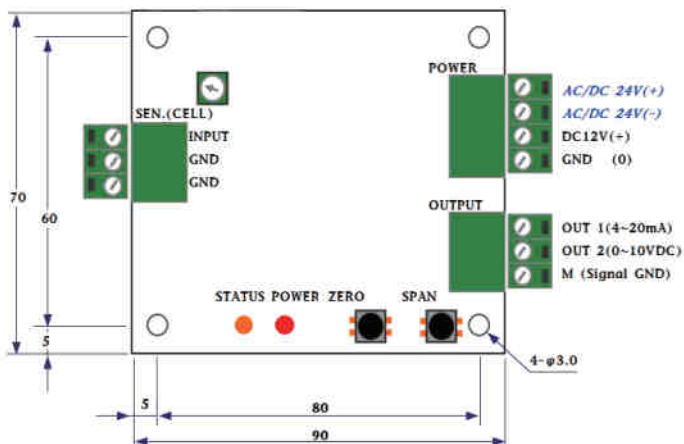



KCD-ON200 (Zirconia)

Measurement

Measurement range	0.1(1) ~ 25.0% O ₂
Measuring method	Zirconia (ZrO ₂ Limit Current Type)
Error range after calibration	<±1 %
Repeatability	±1 % of measured value

General

Operating Temperature	-20 ~ 70°C
Operating Humidity	98%RH, (Non-condensing)
Permissible gas temperature	-10°C to +50°C
Operating humidity	2 minutes

Interface

Display	Concentration display : FND 3 Digit Control Output (1) LED (if open collector on) Control Output (2) LED (if open collector on)
Controller	Rotary Encoder Switch

Electrical

Power supply	12~24 VDC
Power Consumption	Below 3W
Analog Output	4~20mA, 0 ~ 5VDC
Communication Type	RS-485 (Modbus RTU)
Open Collector Output	Output Control (1), Control(2) : below 100mA, DC24V

Dimensions

Dimensions	68mm x 100mm x height 40 mm Distance between holes : 112 mm
Weight	165 g

- (1) Long exposure to oxygen concentrations below 0.1% can affect the measuring elements.
- (2) Calibrate under stable atmospheric pressure conditions.
- (3) The sensor measures oxygen concentration by measuring the partial pressure of oxygen in the module. Therefore, there may be variations depending on the air pressure being calibrated. It can be used through calibration at atmospheric pressure in the environment of use.
- (4) Calibration to specific concentrations is possible.

Features

- Zirconium Dioxide (ZrO₂ Measuring element)
- Reliable long-term use
- Various output signals
- Analog Output: 4-20mA , 0 - 5VDC
- Communication: RS 485(Modbus RTU)
- 2 open collector contacts for remote control
- High precision, high accuracy
- high linear output signal
- Easy calibration
- Easy installation (small and light)


Application

- Accident prevention occurred by lack of oxygen
- Accident prevention in enclosed area
- Combustion control System
- Monitor air quality in workshop, laboratory
- Gas mixing control system (Steel Mill)
- Oxygen generating control System
- Medical LAB equipment (cell culture equipment)
- Crop storage, transport equipment
- Detect fermentation and corruption

Caution

The oxygen concentration in the atmosphere is known to be about 20.9% (20.946%) but this is a dry atmosphere. However, the calibration using the atmospheric reference button is set to 20.7% considering the surrounding environment and humidity conditions. Any value can be set by communication using calibration gas. Please check the communication protocol to check the settings

Dimensions

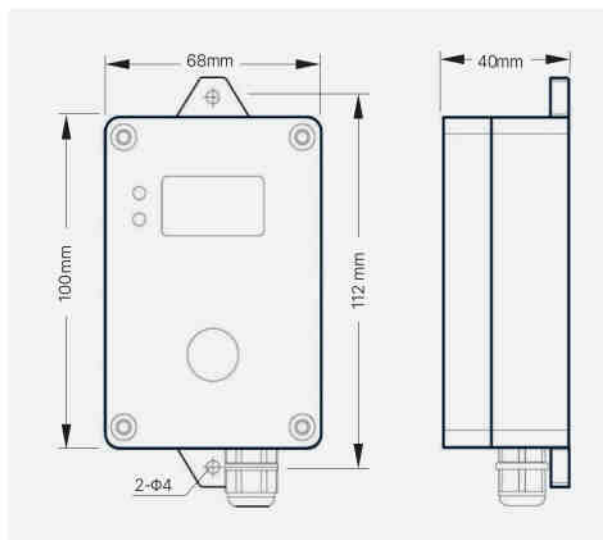

※ The above images and specifications are subject to change without notice for performance and quality improvement.



Agriculture Sensors



PE300 (pH, EC Controller)

Measurement

Measurement Range	pH 0.0 ~ 14.0, EC 0 ~ 5dS/m
Accuracy	pH ± 0.05 (@ pH3 ~ pH8) EC $\pm 2\%$ F.S. (@ 0 ~ 4dS/m)
Temperature compensation	Temperature compensation factor applied
Display	128x 64 Wide Graphic LCD
Control	4 button switch

General

Storage temperature	-20 ~ 80°C
Operating environment	0 ~ 50°C, ~95%RH(Non-condensing)

Electrical

Power supply	24 VDC $\pm 10\%$
Current consumption	100mA (@24V)
Analog Output	4~20mA
Communication	RS-485 (Modbus RTU)
Output contact	Relay 2 (SPST)
Electrode manual calibration	pH Offset (pH7), Span (pH4 or pH10) EC Offset, Span

Dimensions

Board	180mm x 130 mm x H36mm
Mounting dimension	162mm x 112mm $\Phi 4.0$ 4ea
Weight	300g (except electrode)



PE-300_10A (Conductivity Electrode)

Technical Data


Body Material	ABS
Element	2-cell graphite
Operating Temperature	0 ~ 80°C
Dimensions	$\Phi 12\text{mm} \times 120\text{mm}$ (Cable: 4p 3m)
K cell Values	1
Temp. Sensor	Thermistor 10k Ω / R25°C
Dimensions	$\Phi 12\text{mm} \times 120\text{mm}$



PE-300_10B (pH Electrode)

Technical Data


pH Range	0 ~ 14
Slope (pH 7 ~ pH4 Buffer)	165 ~ 180mV (@25°C)
Operating Temperature	0 ~ 80°C
Operating Pressure	0 ~ 40psi (@25°C)
Response Time	30sec (@25°C, $\pm 0.1\text{pH}$ unit)
Dimensions	$\Phi 12\text{mm} \times 115\text{mm}$ (Cable: 2p 3m)

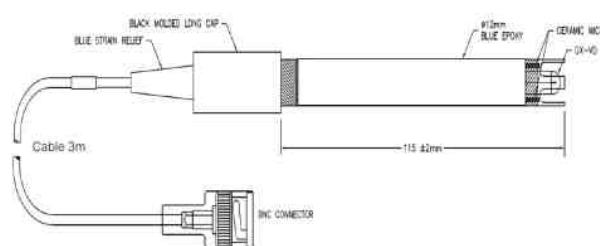

* Medium value of detection range with equipment conditions of the manufacturing plant @25°C.

※ The above images and specifications are subject to change without notice for performance and quality improvement.

※ Temperature calibration is applied for EC control.

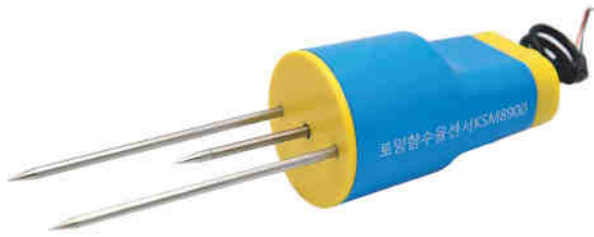

KSM8900 (Soil Sensor)

Measurement

Measurement range	Soil moisture content : 0 ~ 50%VWC Electrical conductivity : 0 ~ 10dS/m Soil temperature : -40 ~ 60°C
Accuracy (@25°C)	Soil moisture content : ±3%VWC (0~50%VWC) Electrical conductivity : ±0.1dS/m (@ 0~1dS/m) ±10% (@ 1~10dS/m) Soil temperature : ±1°C
Measurement cycle	MIN. 1 second

General


Initial start-up time	< 10 seconds
Operating temperature	-40 ~ 60°C
Operating humidity	below 95%RH

Electrical

Power supply	5 ~ 24VDC
Current consumption	70mA @5V
Communication	RS-485 (Modbus RTU)

Dimensions

External dimension	120mm x Ø60mm (electrode length 110mm)
Weight	360g (include cable)
Cable length	3m

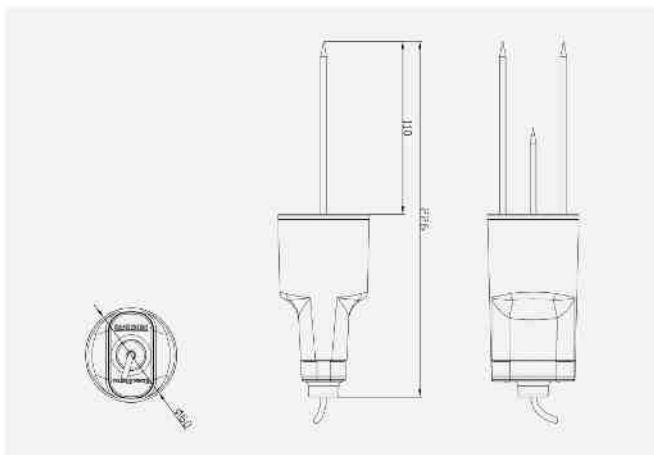

KCD-NPK

Measurement

Measurement range	Soil temperature : -40 ~ 60°C Soil moisture content : 0 ~ 50%VWC pH : 3 ~ 9 Soil EC : 0 ~ 10dS/m N, P, K : 1 ~ 1999mg/L Soil temperature : ±5°C
Accuracy (@25°C)	±3%VWC pH : ±0.3 Soil EC : ±3% N, P, K : ±3%
Soil moisture content	
Response time	Soil temperature : Less than 15sec. Soil moisture content : Less than 4sec. pH : Less than 10sec. Soil EC : 1sec. N, P, K : 1sec.

Electrical

Power supply	5 ~ 24VDC
Current consumption	70mA @5V
Communication	RS-485 (Modbus RTU)


Dimensions

External dimension	125mm x Ø45mm (electrode length 65mm)
Weight	145g (include cable)
Cable length	3m

Appearance



Connect

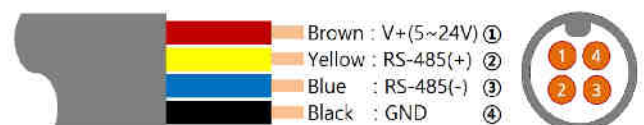

※ The above images and specifications are subject to change without notice for performance and quality improvement.

※ The above images and specifications are subject to change without notice for performance and quality improvement.

Agriculture Sensors



SWSR-7500 (Pyrheliometer Sensor)

Measurement

Measurement range	0~2,000 W/m ²
Spectral range	400~1,000nm
Resolution	1 W/m ²
Accuracy	±5%

General


Storage temperature	-40~80°C
Operating Environment	-40 ~ 60°C, Max 95%RH

Electrical

Power supply	5~24VDC
Current consumption	10mA
Communication	RS-485 (Modbus RTU)

Dimensions

Out	Sensor 43mm x 48mm(Dia. x H)
Dimension	Bracket 270mm x 70mm x 60mm AL 3.0t Cable 3m

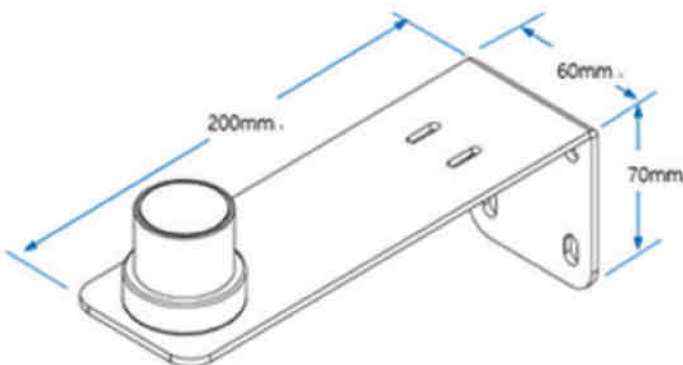

SWSR-7900 (Ambient Light Sensor)

Measurement

Measurement range	1 ~ 100,000lux
Spectral range	400~700nm
Resolution	1lux
Accuracy	±5%

General


Storage temperature	-40~80°C
Operating Environment	50°C, Max 95%RH

Electrical

Power supply	5~24VDC
Current consumption	10mA
Communication	RS-485 (Modbus RTU)

Dimensions

Out	Sensor 43mm x 48mm(Dia. x H)
Dimension	Bracket 270mm x 70mm x 60mm AL 3.0t Cable 3m

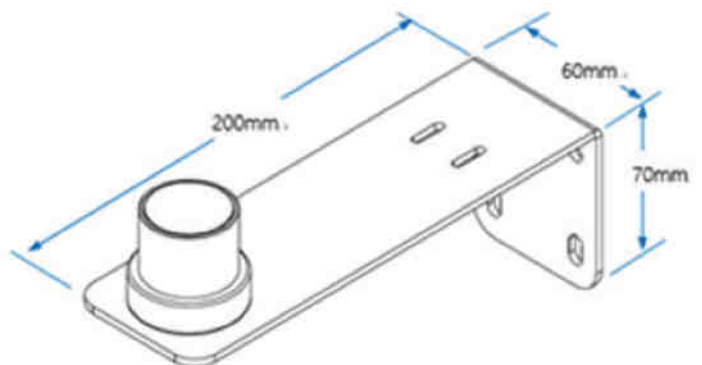



KSH-7330 (Temperature and humidity sensor)

Measurement

Measuring method	Humidity : Capacity method Temperature : Semiconductor
Measurement range	Humidity : ~ 99%RH Temperature : -40 ~ 60°C
Accuracy (@25°C)	Humidity : ±3% (10~90%RH) Temperature : ±0.3 °C

General

Operating temperature	-40 ~ 70°C
Operating humidity	99%RH, non condensing

Electrical

Power supply	5~24VDC
Current consumption	10mA (@5V)
Communication	RS-485 (Modbus RTU) Option : KSH7320 : SM-BUS

Dimensions

Sensor body	Φ24mm x 104mm (except cable)
Cable	M12-4P, 3m
Weight	140g (including cable)
Connector	M12-4p

Appearance



Connect



KST-7150 (Soil, water temperature sensor)

Measurement

Measurement type	Semiconductor type
Measurement range	-20 ~ 80°C
Accuracy	± 0.3 °C

Electrical

Power supply	5~24VDC
Current consumption	< 0.5W
Communication	RS-485 (Modbus RTU) (Maximum speed : 115,200bps)


Dimensions

Dimensions	probe side Φ4mm x 120mm (SUS) converter side Φ17mm x 93mm (Plastic) cable : 4p 3m
Weight	100g (cable included)

Appearance



Connection

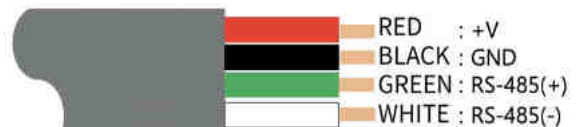

Features

- Suitable for measuring the temperature of nutrient solution and root-zone.
- Semiconductor temperature sensor with excellent safety and durability against chemicals.
- Detection unit is made of stainless steel with strong corrosion resistance.
- Signal conversion unit is made of acetyl resin and high environmental resistance.
- IP67 class Waterproof rating.

※ The above images and specifications are subject to change without notice for performance and quality improvement.

Measurement Controller



PL-100-CO₂ (Measurement indicator)

Measuring type

Applicable Sensor	CO ₂ Sensor and etc (Check Sensecube Product)
Channel	2 Channels (2 sensors can be connected at the same time)
Data logging	65,536point (It may vary depending on the connection sensor)
Language	English

General

Storage Temperature	-20 ~ 80°C
Measure Environment	0 ~ 50°C, Max 95%RH (non-condensing)

Interface

Display	DOT matrix graphics LCD
Setting	4 button Switch

Electrical

Power Supply	Lithium polymer battery (3.7V, 1,000mAh)
Charging Type	USB (C- Type, DC5V)
Sensor Power	DC5V, DC24V selectable (Selectable from the meter menu after connection, depending on the specifications of the connection sensor)

Dimensions

Size	91mm x 178 mm x H42mm
Weight	280g (Sensor excluded)

Feature

- Easy-to-use portable measurement indicator
- Two sensors can be measured at the same time
- Store up to 65,000 logging data(It may vary depending on the sensor type)
- Continuous use time after charging depends on the sensors
- Dot Matrix Graphics LCD
- Support English

Application Model

- a portable measuring instrument
- Analysis of stored data



※ The above images and specifications are subject to change without notice for performance and quality improvement.



PL-100-NPK (Measurement indicator)

Measuring type

Applicable Sensor	CO ₂ Sensor and etc (Check Sensecube Product)
Channel	2 Channels (2 sensors can be connected at the same time)
Data logging	65,536point (It may vary depending on the connection sensor)
Language	English

General

Storage Temperature	-20 ~ 80℃
Measure Environment	0 ~ 50℃, Max 95%RH (non-condensing)

Interface

Display	DOT matrix graphics LCD
Setting	4 button Switch

Electrical

Power Supply	Lithium polymer battery (3.7V, 1,000mAh)
Charging Type	USB (C- Type, DC5V)
Sensor Power	DC5V, DC24V selectable (Selectable from the meter menu after connection, depending on the specifications of the connection sensor)

Dimensions

Size	91mm x 178 mm x H42mm
Weight	280g (Sensor excluded)

Feature

- Easy-to-use portable measurement indicator
- Two sensors can be measured at the same time
- Store up to 65,000 logging data(It may vary depending on the sensor type)
- Continuous use time after charging depends on the sensors
- Dot Matrix Graphics LCD
- Support English

Application Model

- a portable measuring instrument
- Analysis of stored data



※ The above images and specifications are subject to change without notice for performance and quality improvement.

Measurement Controller



KCD-DA300 (Display / Controller)

Measuring type

Applicable Sensor	CO ₂ Sensor and etc (Check Sensecube Product)
Accuracy / repeatability	Check Sensor Specification Table

General

Storage temperature	-20 ~ 80°C
Measure Environment	0 ~ 60°C, Max 95%RH (non-condensing)

Interface


Display	DOT matrix graphics LCD
Setting	4 button Switch

Electrical

Power supply	DC24V
Current consumption	About 50mA (Sensor consumption current excluded)
Communication	RS-485(Modbus RTU)
Communication speed	38,400bps (2400 ~ 115,200bps Changeable)
Communication cycle	1 sec
Power supply	Selectable from DC5V, DC12V, DC24V (According to sensor)

Dimension

Size	86mm x 86 mm x H26mm (sensor excluded)
Weight	About 150g (Sensor excluded)

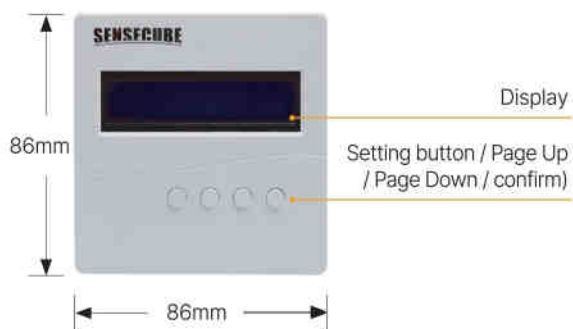

Feature

- Various sensors can be connected
- Support external RS-485(Modbus RTU)
- Support for 2 relays for output control
- Display current value
- Output Contact Point, During Settings
- Dot matrix graphics LCD


Appication

- Measurements and indicators
- Environmental control and alarm system
- Various sensors can be connected

Applicable Sensors

- CO₂ sensor KCD-HPxx series
2,000ppm, 5,000ppm, 1%, 5%, 10%, 20%
- O₂ sensor KCD-ON-3xx series 25%, 100%
- Soil Sensor : KSM-8900
- Soil temperature, Soil water content, Soil EC
- Solar radiation Sensor
- Temperature and humidity sensor

※ The above images and specifications are subject to change without notice for performance and quality improvement.

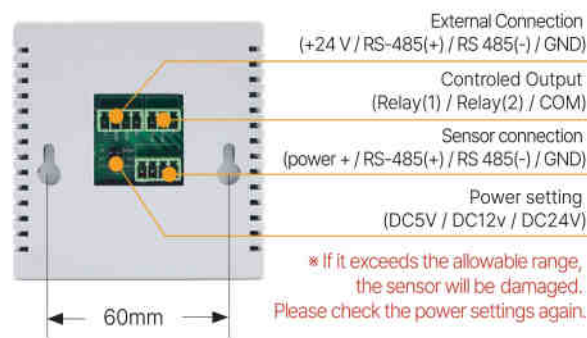



Software



SR-100 (Sensor logging program and Converter)

Real-Time Data Collection & Time Series Analysis

- Supports Window 7/8 / 8.1 / 10, Korean and English
- Modbus Protocol RTU based

Easy & Simple Setting Change (detection range, output signal, etc.)

- Encrypted Storage Method (Prevent data postmodification)
- Able to Mark on Graph
- Able to Save Screenshots

Automatic Update to Latest Version when Online

- Able to Collect Data from 31 Sensors



SENSECUBE Communication Converter Sold Separately

- Isolated USB to RS-485/UART (KCD-TK100)

Application Model

- KCD-HP (CO₂ Sensor)
- KCD-HS (CO₂ Sensor)
- KCD-PE (nutrient solution controller)
- KCD-ON3xx (zirconia oxygen sensor)
- KSM8900 (soil sensor)
- KSH7330 (temperature and humidity sensor)
- SWSR-7500 (Solar radiation sensor)

* Depending on the firmware version of the HP series, older models may not be applied

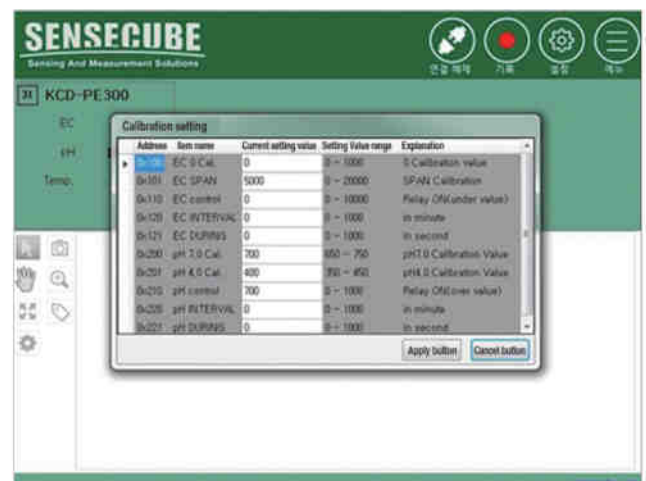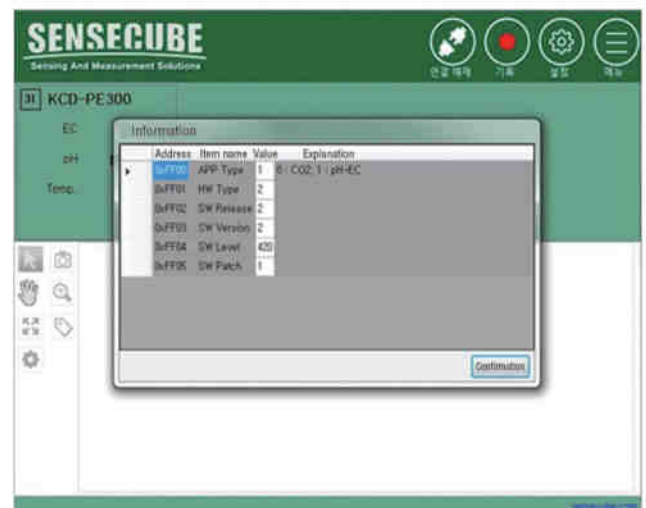

Accessories & Maintenance goods



KSB-7920 (Radiation Shield with Forced ventilation)

Features

- Light PC+ABS shade structure.
- Faster and more accurate with forced ventilation.
- Ring structure, capable of easy installation in agriculture facility.
- Made of corrosion-resistant plastic and stainless steels.


General

- Ventilation Type : Forced Ventilation (DC5V waterproof Fan motor)
- Power supply: DC 5V
- Current consumption : around 40mA
- Sensor O.D.: $\Phi 18 \sim \Phi 25$ mm.
- Size : $\Phi 160 \times H210$
- Weight : 760g (sensor, cable excluded)

Others

- Fan motor drive Power is not included
- Cable(connecting with sensor or fan motor / 4P, 3m) is sold separately

Dimensions

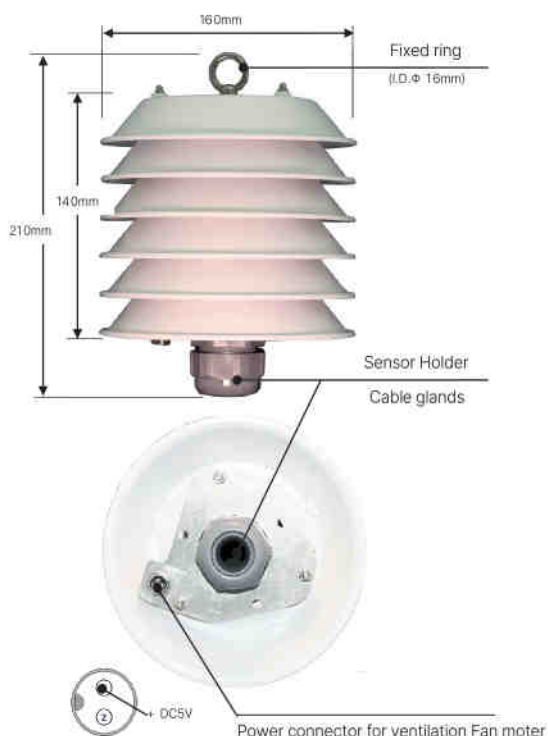

KCD-TK100 (USB to RS-485/UART Converter)

Measurement

Communication Type	① RS- 485 (RS485+, RS485-)
	② UART Universal asynchronous receiver transmitter
	3.3 ~5V TTL
	※ ① or ② Selective use
	① and ② Simultaneous use is not supported
communication speed	Baudrate ~115,200bps
Insulation voltage	2.5 kV
Measure Environment	Temperature -20 ~ 70℃
	Humidity 98%RH, (non-condensing)

Dimensions

Size	Body 51 mm x 85mm x 30 mm
	Cable 1.5m
Weight	about 100g

- Baudrate : ~115,200bps
- RS-485 : 2 Wire
- UART : 3,3~5V TTL

Oxygen Galvanic cell	Applicable Model
 • M-04 (Galvanic Cell) • Range 0.1~99.9 Vol% • Applicable Model : KCD-ON100	

Oxygen Galvanic cell	Applicable Model
 • M-04 (Galvanic Cell) • Range 0.1~99.9 Vol% • Applicable Model : KCD-ON100	

Sensor Bracket	Applicable Model
 • KCD-BR (01) • Material : Acetal, Stainless Steel • Applicable Model : KCD-HP series	

Sensor Bracket	Applicable Model
 • KCD-BR (01) • Material : Acetal, Stainless Steel • Applicable Model : KCD-HP series	

Oxygen Galvanic cell	Applicable Model
 • KCD-BR (02) • Material : Acetal, Stainless Steel • Applicable Model : KCD-HS series	

Oxygen Galvanic cell	Applicable Model
 • M-04 (Galvanic Cell) • Range 0.1~99.9 Vol% • Applicable Model : KCD-ON100	

Sensor Bracket	Applicable Model
 • KCD-BR (03) • Applicable Model : KCD-KSH7310 • Applicable Model : KCD-HS series • Electrode	

Oxygen Galvanic cell	Applicable Model
 • M-04 (Galvanic Cell) • Range 0.1~99.9 Vol% • Applicable Model : KCD-ON100	

Gas Sensor Filter	Applicable Model
 • KCD-FL • Material : PTEF membrane • Applicable Model : KCD-HP series	

Oxygen Galvanic cell	Applicable Model
 • M-04 (Galvanic Cell) • Range 0.1~99.9 Vol% • Applicable Model : KCD-ON100	

Sensor CAL Adaptor(1)	Applicable Model
 • KCD-CL Kit • Material : Aluminum • Applicable Model : KCD-HP series	